Info. No.:	Item Name:	Item Id.:
793014	Set-Up Instruction	6097175-5

Scale:	Size:	Product Type:	Projection:	Page No.:
	A4	Connectivity to CEON and Registration		1 (2)

Date	Des.	Chk.	A.C.	Revision Change	Chg. Not.	Rev.
20210730	CLN	JYA				00
20220401	CLN	BEDN	X3	Registration added, connectivity IP updated.		01
20221017	CLN	BEDN	X3	Table 1 updated.		02
						03

EMS connectivity, registration and update

This document provides information about the process to follow in order to enable cloud connectivity for configuration, registration, update and connectivity test of EMS on a MAN 2 stroke engine on testbed, and/or quay/sea trials for registration and connectivity test.

Preconditions for EMS and CEON connectivity:

1) EMS Hardware connected and EMS Software installed according to 3094330-2 EMS System Overview & 3094327-9 EMS Software Install and Setup.

2) For registration and update the EMS MOP, mGuard, ECS (MOP B) and managed switch must be connected and powered on.

3) Internet connected to WAN side of mGuard and connectivity requirements fulfilled see 'Requirements for EMS and CEON connectivity' below.

4) mGuard configured and EMS enabled according to 6097178-0.

EMS vATU update and registration:

When connected to CEON the vATU agent update and registration will begin and proceed with the steps described below, this will take several minutes. Please refer to the EMS Quick reference manual.

Note: it is essential that the EMS MOP is connected and powered on during this process!

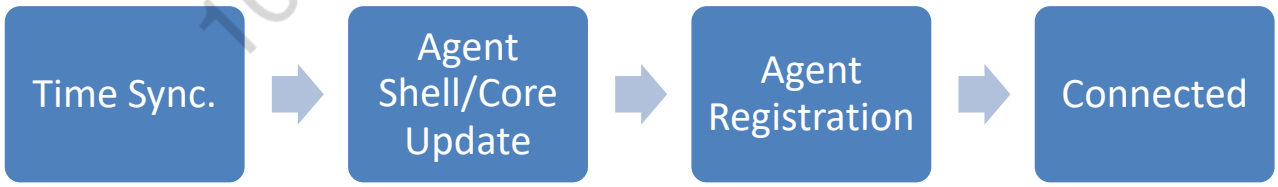

In EMS select 'Status->Network to view update progress:

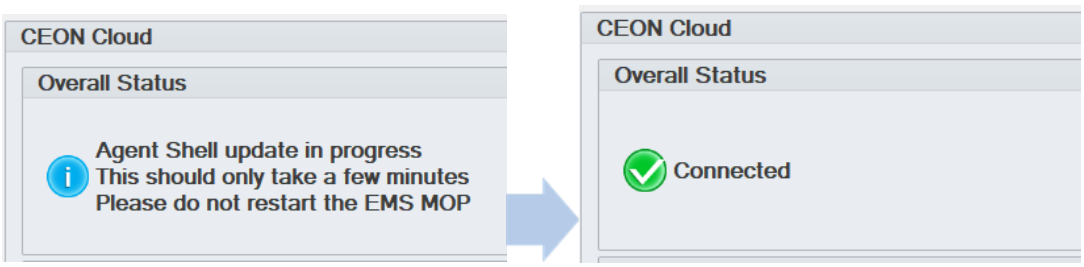

Copyright © 2021 MAN Energy Solutions, branch of MAN Energy Solutions SE, Germany registered with the Danish Business Authority under CVR-no. 31611792 (referred to as "MAN Energy Solutions").

This drawing is the sole property of MAN Energy Solutions, it must be treated as confidential by any party to whom it has been submitted by MAN Energy Solutions, and it is not to be disclosed or transferred to any third party without the specific, prior written permission of MAN Energy Solutions.

Mauro.ceradelli@gnv.it 10 Nov 2025 at 09:50 UTC

Requirements for EMS and CEON connectivity, SAT/WAN connection:

1) A static or DHCP provided address that enables the mGuard to connect to the internet. IP settings can be configured in the EMS program, refer to the EMS User Guide.

2) A network cable (CAT 6 or 6A) connection from mGuard WAN port to testbed/plant/vessel communication gateway.

3) IT dept. or SAT provider to ensure continuous connectivity to destination IP's and ports as specified in Table 1 below.

Table 1

	Opens for	IP	Port number	Port type
3a	CEON access	35.156.77.222 35.157.233.80 35.156.61.78	443	TCP
3b	Firewall configuration and updates	149.247.176.129	443	TCP
3c	Time sync	91.189.94.4 91.189.91.157 35.156.77.222 35.157.233.80 35.156.61.78	123	UDP
3d	Remote access with IPSec VPN using NAT Traversal	149.247.177.99	500 4500	UDP

bruno.ceradelli@gnv.it
10 Nov 2025 at 09:50 UTC

Copyright © 2022 MAN Energy Solutions, branch of MAN Energy Solutions SE Germany, registered with the Danish Business Authority under CVR-no. 31611792 (referred to as "MAN Energy Solutions").

This drawing is the sole property of MAN Energy Solutions, it must be treated as confidential by any party to whom it has been submitted by MAN Energy Solutions, and it is not to be disclosed or transferred to any third party without the specific, prior written permission of MAN Energy Solutions.